



**WATER
RESISTANT**

BRL34Z-GL EWR


Glazed-in louvre with 34 Z-blade



| TECHNICAL DETAILS | |
|---|--|
| Profile | Extruded alu profiles EN AW-6060 T66 (AlMgSi0.5 F22) |
| Profile thickness | min. 1,1 mm |
| Height of the blade | 51 mm |
| Blade pitch | 34 mm |
| Rebate size | 22 mm |
| Glazing thickness | 20, 24, 28, 32 lub 36 mm |
| Visual free area | 29% |
| Physical free area | 21% |
| Stainless steel mesh | RVS (AISI 304) with apertures 2.3 x 2.3 mm |
| Reinforcement | Louvres wider than 700 mm are provided with a reinforcement profile carrying additional blade supports to strengthen the wide louvre |
| INSTALLATION | |
| Fitting into glazing pocket using standard beads and packers. | |
| SHAPES | |
| Rectangular. square | |
| OPTIONS | |
| Insect mesh; water gutter. | |

DIMENSIONS

| |
|---|
| Min. dimension (height x width): 200 x 200 mm |
| Max. dimension (height x width): 2000 x 4000 mm |
| Other dimensions on request |

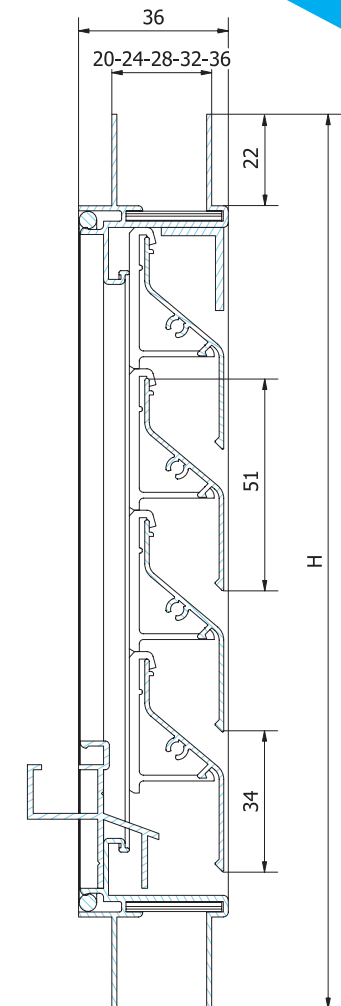

GL EWR